


# Pneumatic Sensor Fittings

## 7818 Pneumatic Sensor Fitting, Male BSPP and Metric Thread



Technical polymer, zamak, brass, NBR




ØD	C	F	H	J	L	L1	kg
M5x0.8	<a href="#">7818 04 19*</a>	8	16	11	43.5	5.5	0.025
G1/8	<a href="#">7818 04 10</a>	14	23	16	44.5	8	0.043
G1/4	<a href="#">7818 04 13</a>	17	28	19.5	46.5	10	0.061
G3/8	<a href="#">7818 04 17</a>	22	29	23.5	49	12	0.083
G1/2	<a href="#">7818 04 21</a>	27	30	31.5	52.5	16	0.125

\* Bolt zinc passivated steel

## 7818 Pneumatic Sensor, Male/Female BSPP Thread



Technical polymer, zamak, brass, NBR




C	F	H	J	L	L1	kg	
G1/8	<a href="#">7818 19 10</a>	14	23	16	40.5	8	0.047
G1/4	<a href="#">7818 19 13</a>	17	28	19.5	42.5	10	0.065

## 7828 Pneumatic/Electric Sensor, Male/Female BSPP and Metric Thread




Technical polymer, brass, NBR



C	F	H	H1	J	L	L1	kg
M5x0.8	<a href="#">7828 00 19</a>	8	20	10	49	5.5	0.120
G1/8	<a href="#">7828 00 10</a>	6	20	10	52	8	0.131
G1/4	<a href="#">7828 00 13</a>	8	20	10	54	10.5	0.145
G3/8	<a href="#">7828 00 17</a>	10	22	12	57	14	0.182
G1/2	<a href="#">7828 00 21</a>	12	26	14	58	16.5	0.206

### Cylinder Pressure Cycle

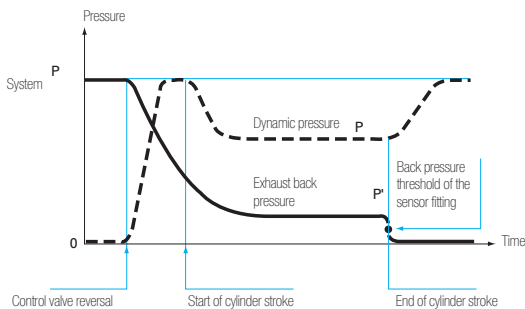

### Installation Diagram

Depending on model, S1, S2 and P1 may be pneumatic or electric. See the installation diagrams opposite.

