

G250

Medium Duty

DESIGN/CONSTRUCTION


- Compact size for light to medium duty applications
- Acetylene, Oxygen and LP gas models
- Color coded knobs
- Single stage
- Forged brass body & Zinc Aluminum housing cap
- 2" (50.8 mm) gauges
- Delivery ranges vary based on model (see ordering information)
- 9/16"-18 outlet connection
- Internal relief



WEIGHT

3 lb (1.36 kg)

G250 FLOW DATA

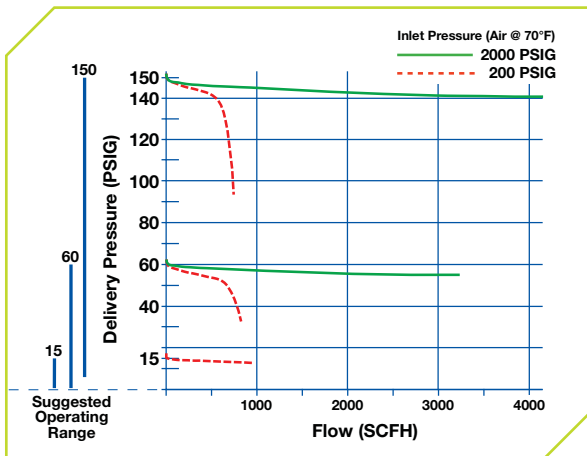

Gas Service	Part No.	Model No.	Delivery Range (psig)
Oxygen	0781-9400	G250-150-540	150
	0781-9405	G250-15-510	15
Acetylene	0781-9406	G250-15-300	15
	0781-9410	G250-60-510LP	60

SR 250

Medium Duty

DESIGN/CONSTRUCTION

- 2" (50.8 mm) gauges – brass
- 1.75" (44.5 mm) diaphragm – fabric reinforced neoprene

DIMENSIONS

6.38" W x 5.13" H x 4.25" D
(162.0 mm x 130.3 mm x 108.0 mm)

WEIGHT


2 lb 15 oz (1.33 kg)

PERFORMANCE

Maximum inlet – 3000 psig



SR250 FLOW DATA

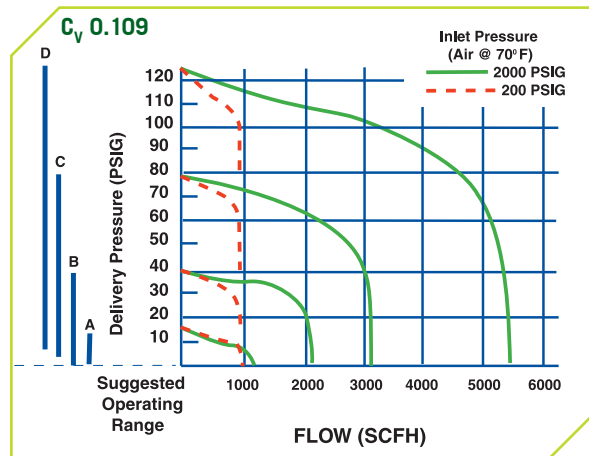

Gas Service	Part No.	Model No.	Delivery Range (psig)
Oxygen	0781-0027	SR 250C-540	4-80
	0781-0043	SR 250D-540	5-125
	0781-0085	SR 260A-300	2-15
Acetylene	0781-0087	SR 260A-510	2-15
	0387-0115	SR 260A-510 CS	2-15
L.P. Gas	0781-0095	SR 261B-510	2-40
	0781-0098	SR 261C-510	4-80

CS = Clamshell Packaging
Outlet Connections: Cylinder Type – 9/16"-18 (M)

GAUGE GUARDS

Gas Service	Part No.	Model No.
Oxygen	1429-0056	SR 450/VTS 450
	1429-0066	SR 350
	1429-0068	SR 250/VTS 250
Acetylene	1429-0057	SR 450/VTS 450
	1429-0067	SR 350
	1429-0069	SR 250/VTS 250



- Protects your gauges
- Color-coded for easy identification